




0326

CEILING RECESSED

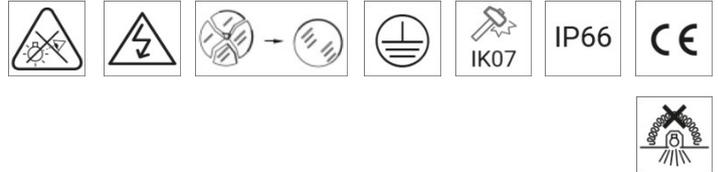

WARNING

ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT PRIOR AUTHORIZATION

Our policy is the constant improvement of the product., We reserve the right to modify the characteristics of the equipment without prior notice. Please refer to the website www.arcluce.it for this and other technical documents continually updated.

All information is presented in good faith. no responsibility may be imputed to us for errors, omissions or incorrect interpretations.

The photographs and drawings are within the limits of the quality of the printed reproduction, not binding and indicative only.



Directive 2002/96/CE (Waste Electrical and Electronic Equipment - WEEE). The crossed out wheeled bin label that this product should not be disposed how the normal household waste stream, but with a separate collection; this in order to prevent potential negative consequences for the environment and the human health. For more details on available collection facilities please contact your local government office or the dealer where you purchased this product.


The safety and the proper functioning of the fitting is guaranteed only respecting the electrical Standards and these mounting instructions; therefore it's necessary to keep them.

Installation should be carried out by a suitable qualified person. Always refer to electrical data on the fixture label.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Only use original ARCLUCE spare parts.



Turn off power before maintenance.



Replace any cracked shield.




Risk group 2 (IEC/TR62778). Do not stare at operating LED.



Luminaires not suitable for covering with thermally insulating material.

SPECIFICATIONS



MECHANICAL

Dimensions:	A: Ø 70 mm B: 62 mm
Weight:	Max 0.3 Kg
Rated Ta:	-20°C +25°C

ELECTRICAL

Wiring:	ON/ OFF
Input:	230V 50Hz

ACCESSORIES

1099259X



Junction box
IP68.

INSTALLATION

1. Perform necessary cut-out in the false ceiling with correct dimensions.
2. Wire the fixture according to the diagram.
3. Hold the springs in upright position and slide fixture in the recessed cut-out.

1

CLEARANCE	
A	20 cm
B	5 cm
C	5 cm
D	10 cm

Allowed ceiling thickness: 1-20mm

⚠️ ⚠️ ⚠️

∅ 60 mm

2

⚠️ Turn off power.

LINE - BROWN
GROUND - YELLOW/GREEN
NEUTRAL - BLUE

⚠️ The cable connection must have an IP rating at least equal or higher than the fixture itself.

⚠️ If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

3